

Protecta® Sidekick™

Tamper-Resistant Bait Station

How to Open Your Protecta® Sidekick™

1 Insert key into one of the locks with key prongs facing to the inside edge of the station.



2 Push key STRAIGHT down firmly then push the top of the key away from the station.



3 As locking prongs release, lift lid upwards with the key.



Open one lock at a time.

Repeat the procedure with the second lock to open the station.

Note: The locking mechanism may be stiff with the first opening. This mechanism becomes more flexible after the first opening.

Protecta® Sidekick™

Tamper-Resistant Bait Station

How to Open Your Protecta® Sidekick™

1 Insert key into one of the locks with key prongs facing to the inside edge of the station.



2 Push key STRAIGHT down firmly then push the top of the key away from the station.



3 As locking prongs release, lift lid upwards with the key.



Open one lock at a time.

Repeat the procedure with the second lock to open the station.

Note: The locking mechanism may be stiff with the first opening. This mechanism becomes more flexible after the first opening.

Protecta® Sidekick™


Tamper-Resistant Bait Station

Inserting Baiting Rods


Sidekick™ Hardware Pack Contains:

- 6** Protecta Service Record Cards
- 18** Protecta Sidekick Vertical Rods
- 1** Protecta Metal Key


1 Insert either end of the Vertical Bait Securing Rod into one of the holes in the floor of the baiting areas.

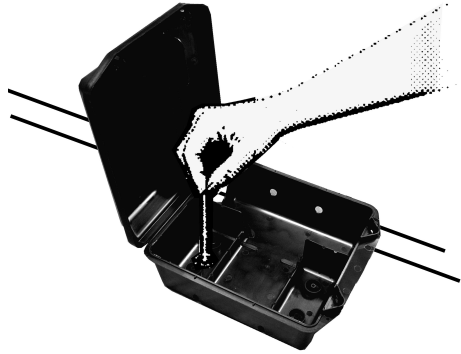

2 Place FASTRAC, FINAL, CONTRAC or DITRAC BLOX onto the Vertical Bait Securing Rod.

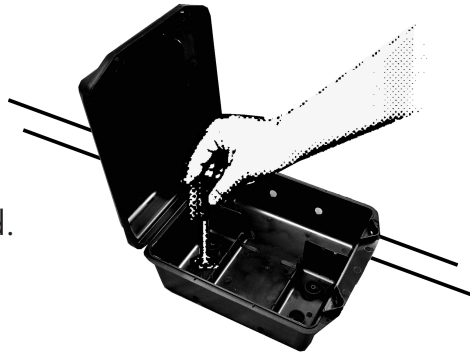

3 Close the lid of the PROTECTA Sidekick to secure rods into place.

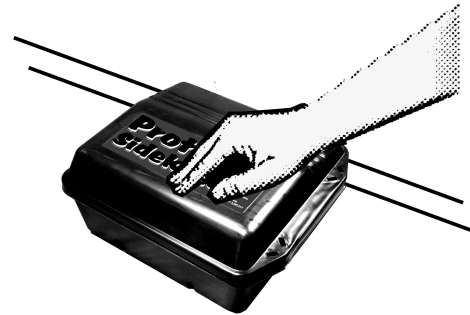

Protecta® Sidekick™


Tamper-Resistant Bait Station

Inserting Baiting Rods


Sidekick™ Hardware Pack Contains:

- 6** Protecta Service Record Cards
- 18** Protecta Sidekick Vertical Rods
- 1** Protecta Metal Key

1 Insert either end of the Vertical Bait Securing Rod into one of the holes in the floor of the baiting areas.

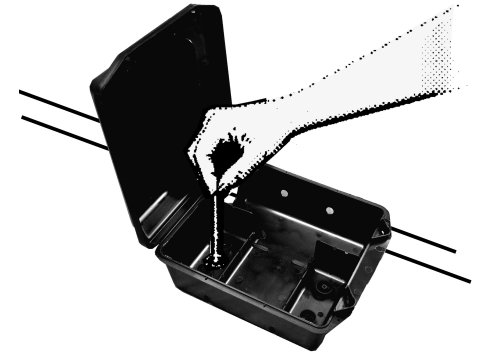

2 Place FASTRAC, FINAL, CONTRAC or DITRAC BLOX onto the Vertical Bait Securing Rod.

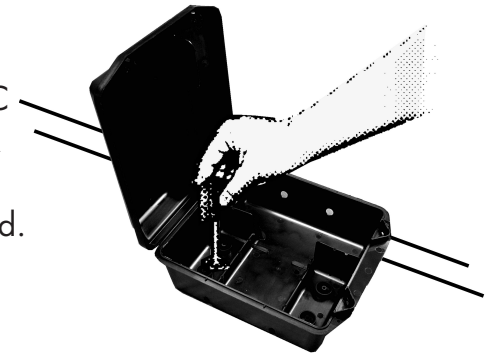

3 Close the lid of the PROTECTA Sidekick to secure rods into place.

